

**PFR - SERVICE POST CONNECTOR**

PFR-120-R-2C

**Description**


**Purpose:** Connection with COPPERSTEEL or copper cables. Used to align one or two downconductors on metal structures, building facades or roofs. Ground one or two cables to steel structures, plates or busbars. Supplied with nut on pigtail.

**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistance.

**Application:** Grounding systems in general and lightning protection systems.

**Material:** Copper alloy.

**Application Tool:** Box, open-ended or monkey wrenches.

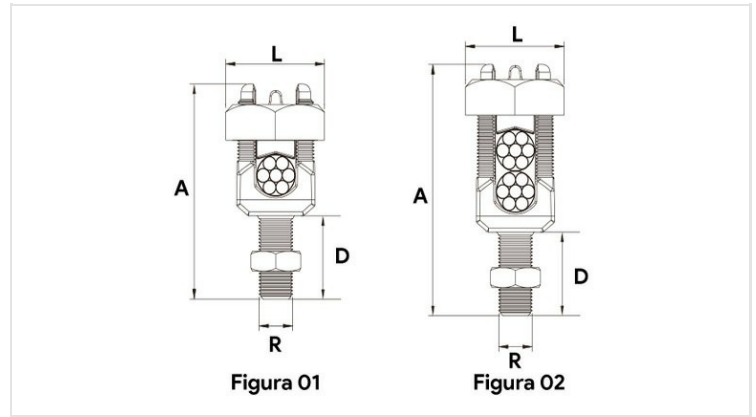

**Datasheet**

|  |           |
|--|-----------|
| <b>Material</b>                                    | BRONZE    |
| <b>Qty. Of Conductors</b>                          | 2         |
| <b>Conductors - Cross Section (mm<sup>2</sup>)</b> |           |
| Minimum  | 50 - 50   |
| Maximum  | 120 - 120 |
| <b>Dimensions (mm)</b>                             |           |
| Figure   | 2         |
| L  | 31,5      |
| A  | 81,4      |
| D  | 25,4      |
| Pigtail - R  | M16 x 2,0 |
| <b>Package</b>                                     |           |
| Qty. / Package                                     | -         |
| Unit Weight (g)                                    | 227,0     |