

GA - GROUNDING CLAMP

GA-12

Description

Purpose: Connection between ground rod and cable or rebar-cable. Suitable for CS - COPPERSTEEL or copper cables.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistant. Allows connecting conductors in parallel.

Application: Grounding systems in general.

Material: Copper alloy body. Clamp: electrolytic zinc plated steel (GA-12) or copper alloy (GA-38).

Finish: GA-38 tin plated

Application Tool: Spanner set or open-ended wrench.

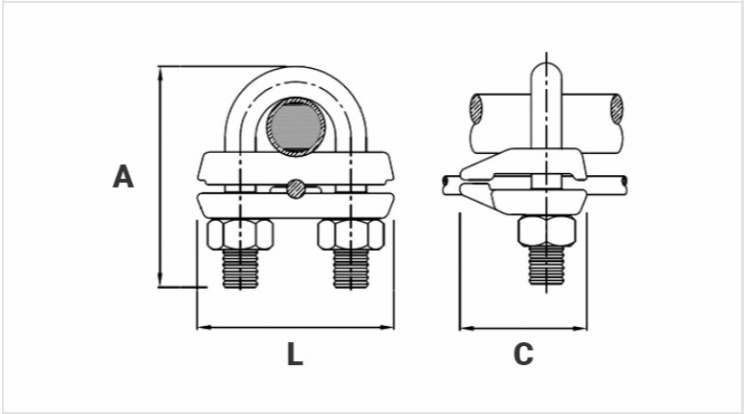

Datasheet

"U" Clamp Material		Aço Zincado Eletrolítico
Ground Rod Nominal Diameter (inches)		1/2" - 5/8"
Steel Rebar Diameter (Inches)		-
Conductor		
AWG/MCM		10 - 1/0
mm²		Fio/cabo 6 - 50
Dimensions (mm)		
L		42,0
A		45,0
C		27,0
Package		
Qty. / Package		70
Unit Weight (g)		92,00