

227,0

PFR - SERVICE POST CONNECTOR

PFR-120-2C

Description

Purpose: Connection with COPPERSTEEL or copper cables. Used to align one or two downconductors on metal structures, building facades or roofs. Ground one or two cables to steel structures, plates or busbars. Supplied with nut on pigtail.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Grounding systems in general and lightning protection systems.

Material: Copper alloy.

Application Tool: Box, open-ended or monkey wrenches.



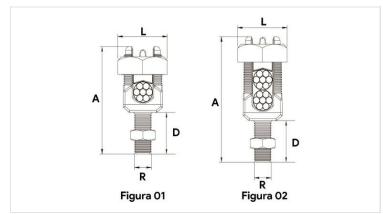

Datasheet

Unit Weight (g)

Material	-
Qty. Of Conductors	2
Conductors - Cross Section (mm²)	
Minimum	50 - 50
Maximum	120 - 120
Dimensions (mm)	
Figure	2
L	31,5
A	81,4
D	25,4
Pigtail - R	M16 + 1,5
Package	
Qty. / Package	-