

PFR - SERVICE POST CONNECTOR

PFR-70R-2C RABICHO M12

Description


Purpose: Connection with COPPERSTEEL or copper cables. Used to align one or two downconductors on metal structures, building facades or roofs. Ground one or two cables to steel structures, plates or busbars. Supplied with nut on pigtail.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Grounding systems in general and lightning protection systems.

Material: Copper alloy.

Application Tool: Box, open-ended or monkey wrenches.

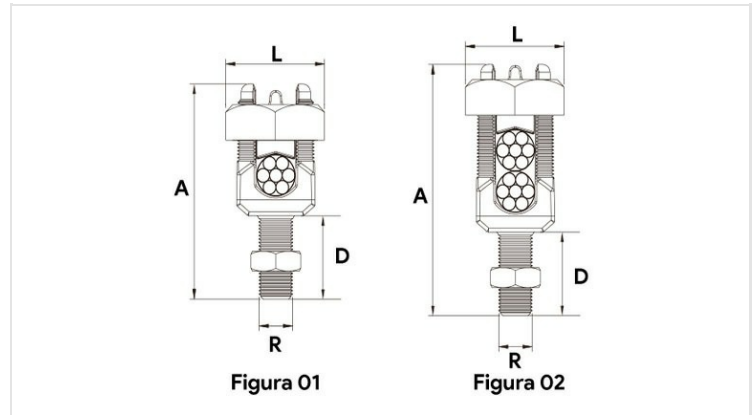

Datasheet

Material	BRONZE
Qty. Of Conductors	2
Conductors - Cross Section (mm²)	
Minimum	10 - 10
Maximum	70 - 70
Dimensions (mm)	
Figure	2
L	27,0
A	63,0
D	21,0
Pigtail - R	M12 x 1,75
Package	
Qty. / Package	25
Unit Weight (g)	120