# GTDU - U-BOLT GROUNDING CLAMP (1 CONDUCTOR)

GTDU 4" IPS 2/0-250

## Description

**Purpose:** Connection between ground rod to cable or IPS tube-cable. Suitable for COPPERSTEEL or copper cables.


**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistant. It allows you to connect a cable, at 90º in relation to the rod / IPS tube.

**Application:** Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding, grounding in telecommunication networks, grounding in substations).

**Material:** Copper alloy clamp, fittings in copper alloy or electrolytic zinc plated steel.

**Application Tool:** Spanner set or open-ended wrench.



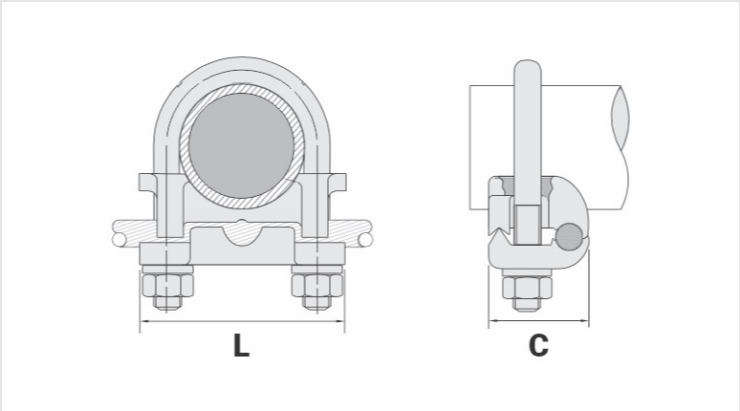


## Datasheet

| | |
|---|---|
| **Conductor** | |
| AWG/MCM | 2/0 - 250 |
| mm² | 70 - 120 |
| **Ground Rod Nominal Diameter (inches)** | - |
| **IPS Tube** | 4" |
| **Accessory Material** | |
| **Dimensions (mm)** | |
| L | 187,0 |
| A | 180,0 |
| C | 60,0 |
| Screw "U" | M12 |
| Figure | 1 |
| **Package** | |
| Qty. / Package | |
| Unit Weight (g) | |