

CDPU - UNIVERSAL PIERCING CONNECTOR

CDPU-35-35

Description



**Purpose:** Connection at the consumer service entrance cable. Suitable for aluminum to aluminum, aluminum to copper and copper to copper connections in low voltage overhead networks (0.6/1kV).

**Features:** Connection by piercing for wires, solid, flexible and extra-flexible (class 1, 2, 5 and 6), with or without insulation. It does not necessary chose the right side to cables install. Suitable for aluminum cables 0,6/1kV, XLPE/PE (class 2) or copper wires / cables (class 1, 2, 5 and 6) 450 / 750V PVC (without cover). It has a shear head nut to ensure a perfect application. It has elastomeric rubbers and two limiters that block conductors during installation, these can be easily removed and customized during its configuration and installation.

**Application:** Overhead insulated low voltage distribution networks.

**Material:** Polymer connector resistant to weather and U.V rays. Tin plated copper contacts.

**Application Tool:** Star or socket wrench.

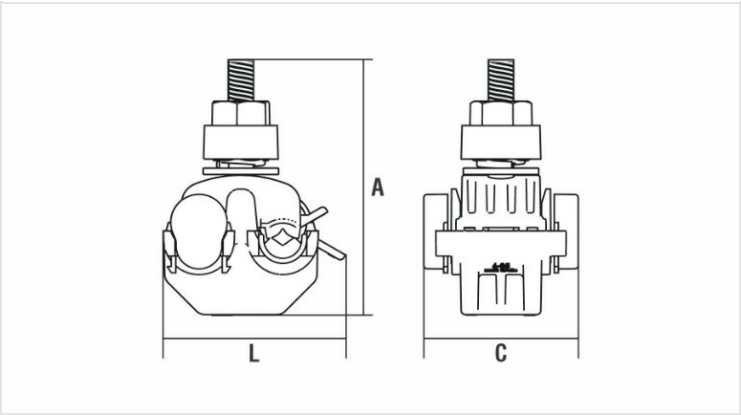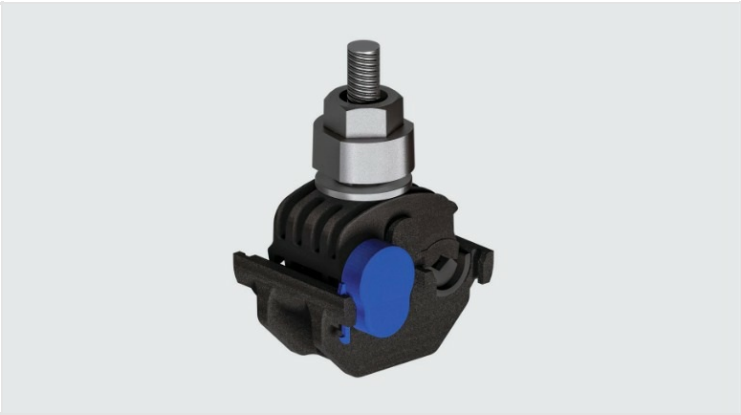

Datasheet

Conductors		
Run	mm²	6 - 35
	AWG/MCM	10 - 2
Tap	mm²	1,5 - 35
	AWG/MCM	16 - 2
Figure		-
Dimensions (mm)		
L		45,0
A		65,0
C		40,0
Package		
Qty. / Package		120
Unit Weight (g)		60,00