

GTDU2C - U-BOLT GROUNDING CLAMP (2 CONDUCTORS)

GTDU2C-3/8"-IPS-4-2/0

Description



Purpose: Connection between ground rod to cable or IPS tube-cable. Suitable for COPPERSTEEL or copper cables.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistant. It allows you to connect two parallel cables.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding, grounding in telecommunication networks, grounding in substations).

Material: Copper alloy clamp, fittings in copper alloy or electrolytic zinc plated steel.

Application Tool: Spanner set or open-ended wrench.

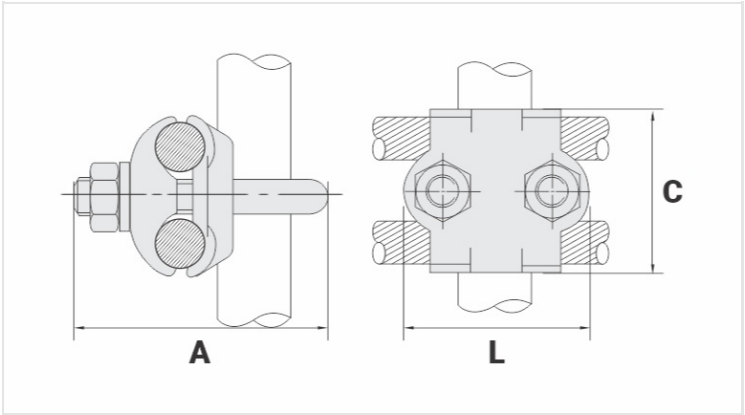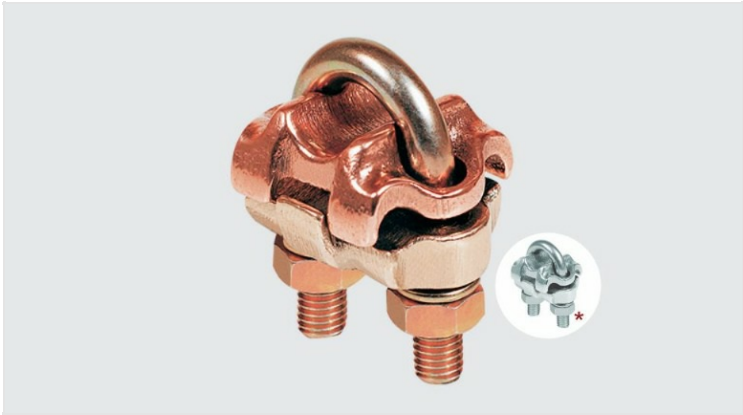

Datasheet

Conductor

AWG/MCM	4 - 2/0
mm ²	16 - 70

Ground Rod Nominal Diameter (inches)	5/8" - 3/4"
--------------------------------------	-------------

IPS Tube	3/8"
----------	------

Accessory Material	AÇO ZINCADO
--------------------	-------------

Dimensions (mm)

L	53,0
A	65,0
C	44,0
Screw "U"	M10
Figure	2

Package

Qty. / Package	20
Unit Weight (g)	322,00