

GTDU2C - U-BOLT GROUNDING CLAMP (2 CONDUCTORS)

GTDU2C-3/8"-IPS-2/0-250

Description


Purpose: Connection between ground rod to cable or IPS tube-cable. Suitable for COPPERSTEEL or copper cables.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistant. It allows you to connect two parallel cables.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding, grounding in telecommunication networks, grounding in substations).

Material: Copper alloy clamp, fittings in copper alloy or electrolytic zinc plated steel.

Application Tool: Spanner set or open-ended wrench.

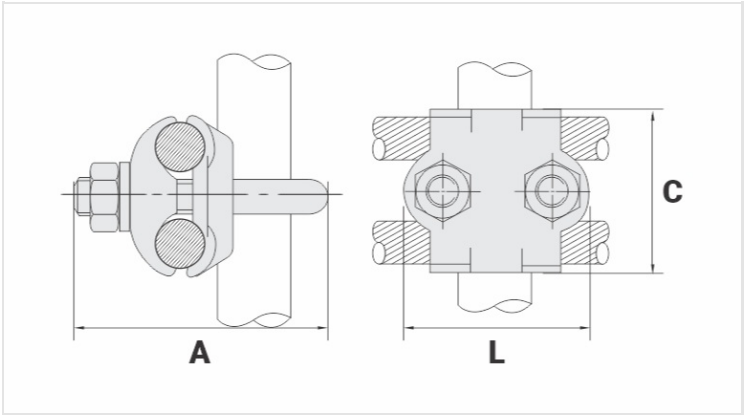

Datasheet

Conductor		
AWG/MCM		2/0 - 250
mm²		70 - 120
Ground Rod Nominal Diameter (inches)		5/8" - 3/4"
IPS Tube		3/8"
Accessory Material		LIGA DE COBRE
Dimensions (mm)		
L		54,0
A		65,0
C		48,0
Screw "U"		M10
Figure		2
Package		
Qty. / Package		15
Unit Weight (g)		363,00