

GTDU2C - U-BOLT GROUNDING CLAMP (2 CONDUCTORS)

GTDU2C 1/2"-3/4" IPS 4-2/0

Description



Purpose: Connection between ground rod to cable or IPS tube-cable. Suitable for COPPERSTEEL or copper cables.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistant. It allows you to connect two parallel cables.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding, grounding in telecommunication networks, grounding in substations).

Material: Copper alloy clamp, fittings in copper alloy or electrolytic zinc plated steel.

Application Tool: Spanner set or open-ended wrench.

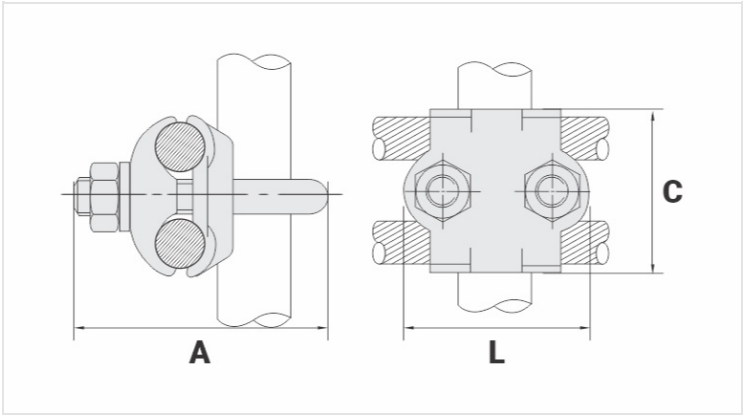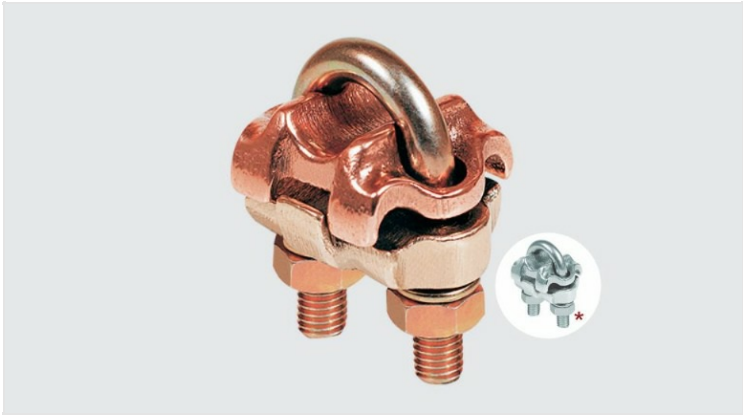

Datasheet

Conductor		
AWG/MCM		4 - 2/0
mm²		16 - 70
Ground Rod Nominal Diameter (inches)		7/8" - 1"
IPS Tube		1/2" - 3/4"
Accessory Material		
Dimensions (mm)		
L		59,0
A		76,0
C		42,0
Screw "U"		M10
Figure		2
Package		
Qty. / Package		
Unit Weight (g)		