
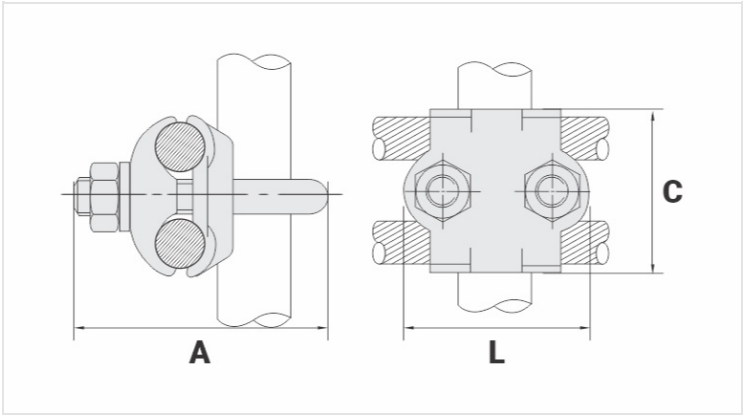


GTDU2C - U-BOLT GROUNDING CLAMP (2 CONDUCTORS)

GTDU2C 2.1/2" IPS 2/0-250

Description

- Purpose:** Connection between ground rod to cable or IPS tube-cable. Suitable for COPPERSTEEL or copper cables.
- Characteristics:** Tightening connection. High electrical conductivity and corrosion resistant. It allows you to connect two parallel cables.
- Application:** Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding, grounding in telecommunication networks, grounding in substations).
- Material:** Copper alloy clamp, fittings in copper alloy or electrolytic zinc plated steel.
- Application Tool:** Spanner set or open-ended wrench.

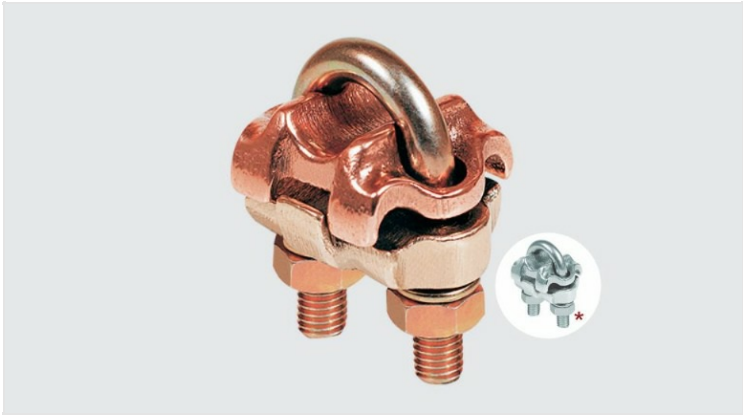

Datasheet

Conductor		
AWG/MCM		2/0 - 250
mm²		70 - 120
Ground Rod Nominal Diameter (inches)		
IPS Tube		2.1/2"
Accessory Material		
Dimensions (mm)		
L		111,0
A		135,0
C		52,0
Screw "U"		M10
Figure		2
Package		
Qty. / Package		
Unit Weight (g)		