

PF - SPLIT BOLT CONNECTOR

PF-10

Description


Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.

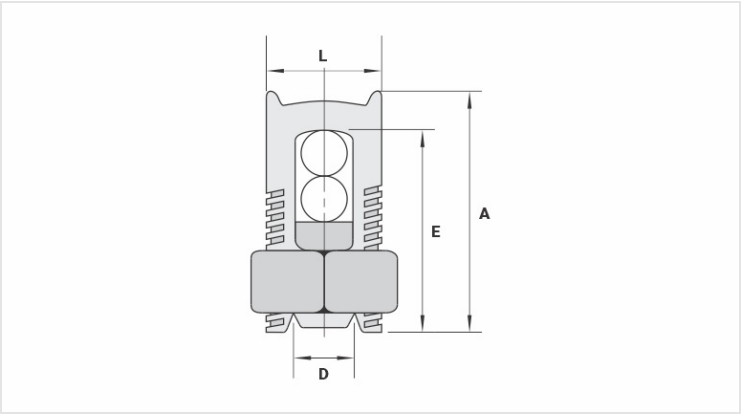

Datasheet

Conductors		
Run (mm²)		10
Tap (mm²)		1,5 - 10
Dimensions (mm)		
L		10,5
A		19,5
C		12,0
D		4,1
E		18,0
Package		
Qty. / Package		100
Unit Weight (g)		15,90