PF - SPLIT BOLT CONNECTOR

PF-10

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.



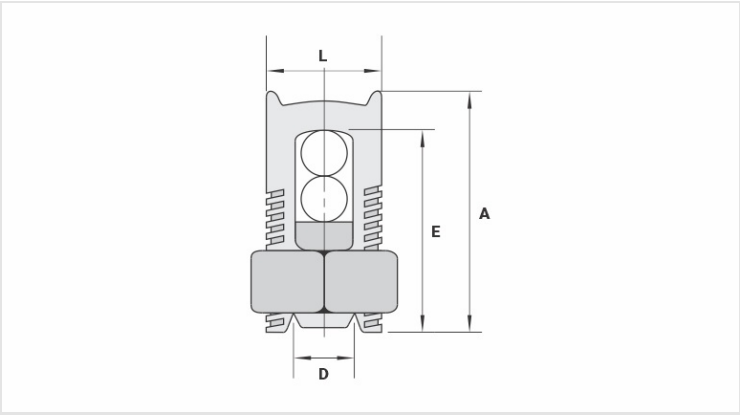

Datasheet

Conductors	
Run (mm²)	10
Tap (mm²)	1,5 - 10
Dimensions (mm)	
L	10,5
A	19,5
C	12,0
D	4,1
E	18,0
Package	
Qty. / Package	100
Unit Weight (g)	15,90