

PF - SPLIT BOLT CONNECTOR

PF-16

Description


**Purpose:** Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.

**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistance.

**Application:** Power distribution network and grounding in general.

**Material:** Body in electrolytic copper. Nut and rider in copper alloy.

**Application Tool:** Box, open-ended or monkey wrenches.

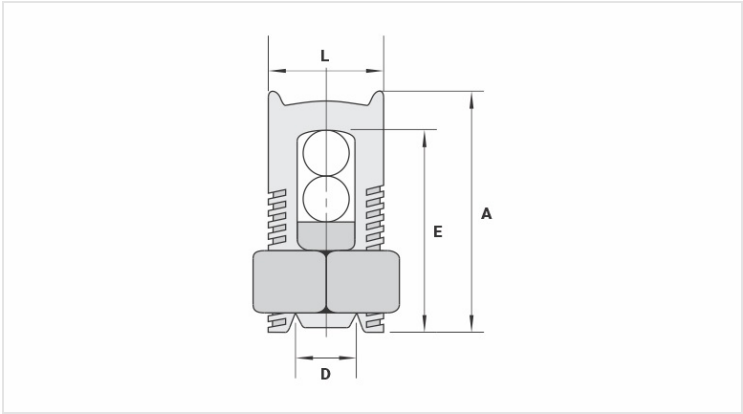

Datasheet

Conductors

Run (mm²)	16
Tap (mm²)	2,5 - 16

Dimensions (mm)

L	11,5
A	23,0
C	15,5
D	5,3
E	21,0

Package

Qty. / Package	50
Unit Weight (g)	27,50