PF - SPLIT BOLT CONNECTOR

PF-16

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.



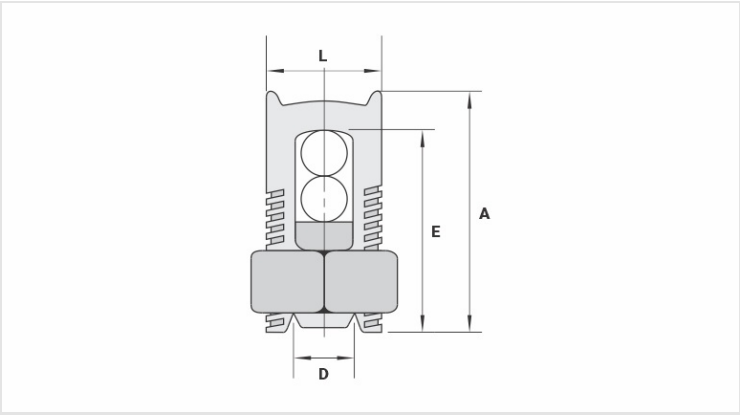

Datasheet

Conductors	
Run (mm²)	16
Tap (mm²)	2,5 - 16
Dimensions (mm)	
L	11,5
A	23,0
C	15,5
D	5,3
E	21,0
Package	
Qty. / Package	50
Unit Weight (g)	27,50