PF - SPLIT BOLT CONNECTOR

PF-25

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.



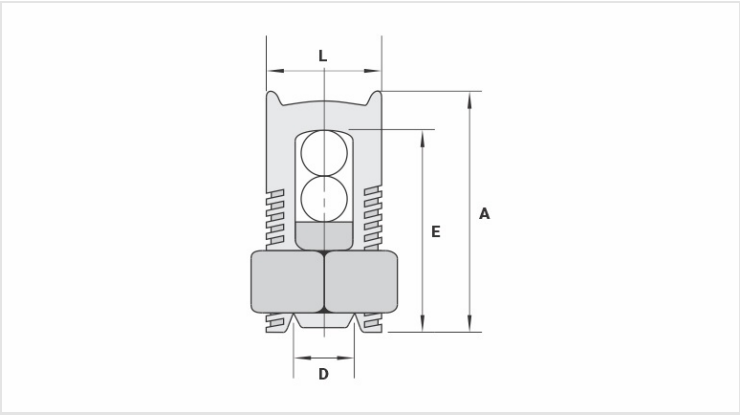

Datasheet

Conductors	
Run (mm²)	25
Tap (mm²)	2,5 - 25
Dimensions (mm)	
L	14,7
A	26,5
C	17,0
D	6,8
E	24,0
Package	
Qty. / Package	50
Unit Weight (g)	33,60