

PF - SPLIT BOLT CONNECTOR

PF-25

Description


Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.

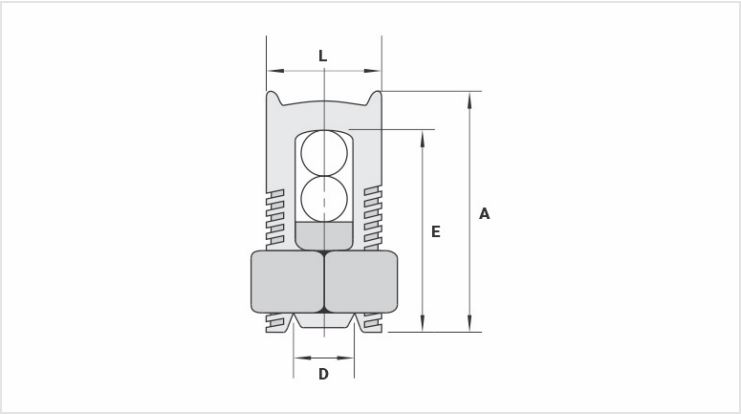

Datasheet

Conductors

Run (mm²)	25
Tap (mm²)	2,5 - 25

Dimensions (mm)

L	14,7
A	26,5
C	17,0
D	6,8
E	24,0

Package

Qty. / Package	50
Unit Weight (g)	33,60