

PF - SPLIT BOLT CONNECTOR

PF-35

Description


**Purpose:** Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.

**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistance.

**Application:** Power distribution network and grounding in general.

**Material:** Body in electrolytic copper. Nut and rider in copper alloy.

**Application Tool:** Box, open-ended or monkey wrenches.

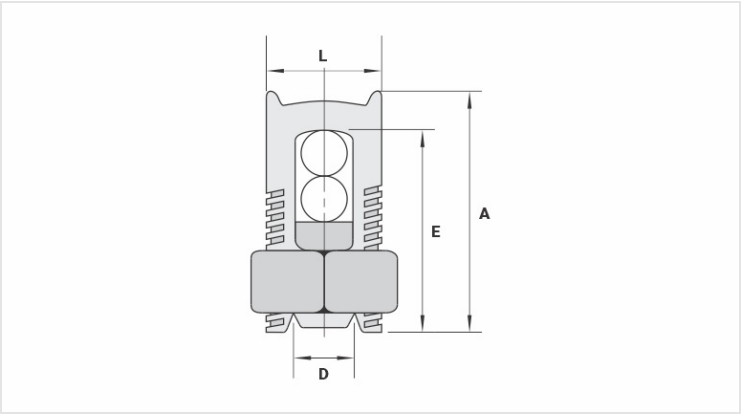

Datasheet

Conductors

Run (mm²)	35
Tap (mm²)	2,5 - 35

Dimensions (mm)

L	15,6
A	29,0
C	19,0
D	7,9
E	26,8

Package

Qty. / Package	50
Unit Weight (g)	42,00