PF - SPLIT BOLT CONNECTOR

PF-50

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.



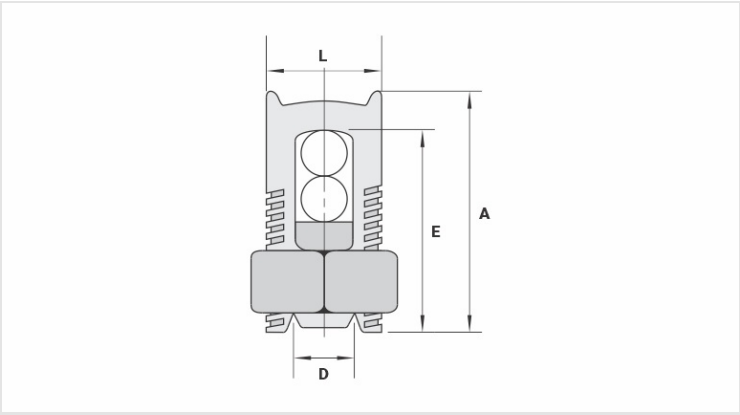

Datasheet

Conductors	
Run (mm²)	50
Tap (mm²)	2,5 - 50
Dimensions (mm)	
L	18,0
A	34,0
C	20,0
D	9,5
E	32,0
Package	
Qty. / Package	30
Unit Weight (g)	61,80