PF - SPLIT BOLT CONNECTOR

PF-70

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.



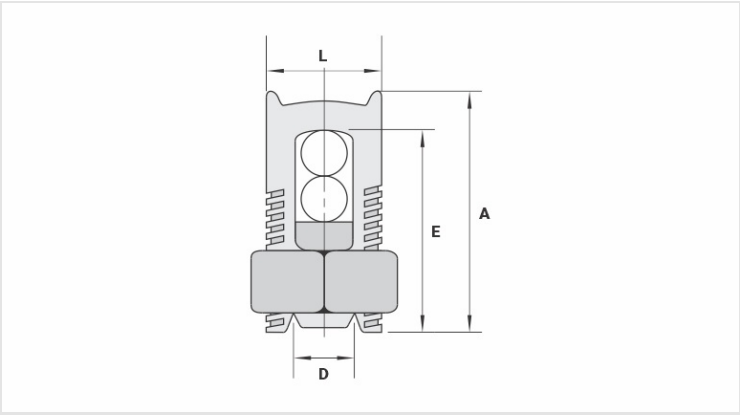

Datasheet

Conductors	
Run (mm²)	70
Tap (mm²)	2,5 - 70
Dimensions (mm)	
L	20,5
A	39,0
C	22,0
D	10,7
E	36,0
Package	
Qty. / Package	30
Unit Weight (g)	85,60