PF - SPLIT BOLT CONNECTOR

PF-95

Description

Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.


Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.



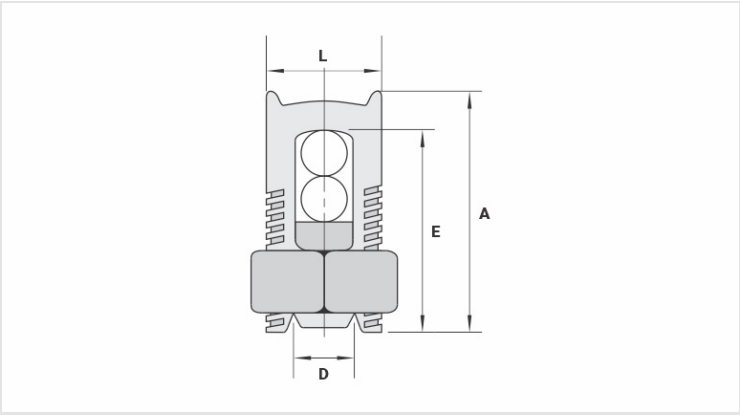

Datasheet

Conductors	
Run (mm²)	95
Tap (mm²)	25 - 95
Dimensions (mm)	
L	28,0
A	45,0
C	28,0
D	13,5
E	42,0
Package	
Qty. / Package	20
Unit Weight (g)	136,80