

PF - SPLIT BOLT CONNECTOR

PF-95

Description


Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.

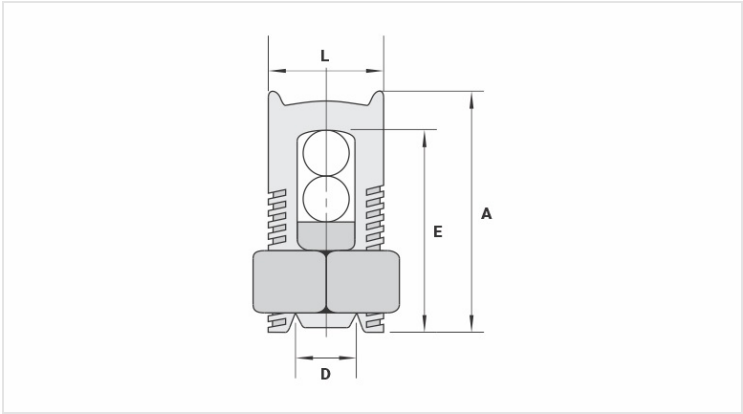

Datasheet

Conductors		
Run (mm²)		95
Tap (mm²)		25 - 95
Dimensions (mm)		
L		28,0
A		45,0
C		28,0
D		13,5
E		42,0
Package		
Qty. / Package		20
Unit Weight (g)		136,80