

PF - SPLIT BOLT CONNECTOR

PF-120

Description


**Purpose:** Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.

**Characteristics:** Tightening connection. High electrical conductivity and corrosion resistance.

**Application:** Power distribution network and grounding in general.

**Material:** Body in electrolytic copper. Nut and rider in copper alloy.

**Application Tool:** Box, open-ended or monkey wrenches.

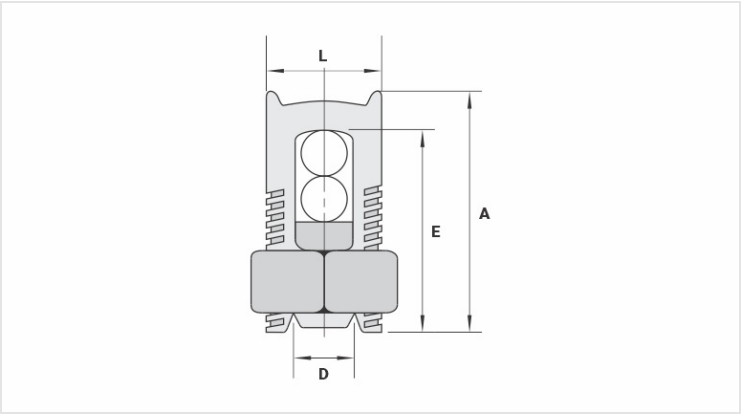

Datasheet

Conductors		
Run (mm²)		120
Tap (mm²)		10 - 120
Dimensions (mm)		
L		26,8
A		46,0
C		28,0
D		14,7
E		44,0
Package		
Qty. / Package		20
Unit Weight (g)		138,60