

PF - SPLIT BOLT CONNECTOR

PF-150

Description


Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.

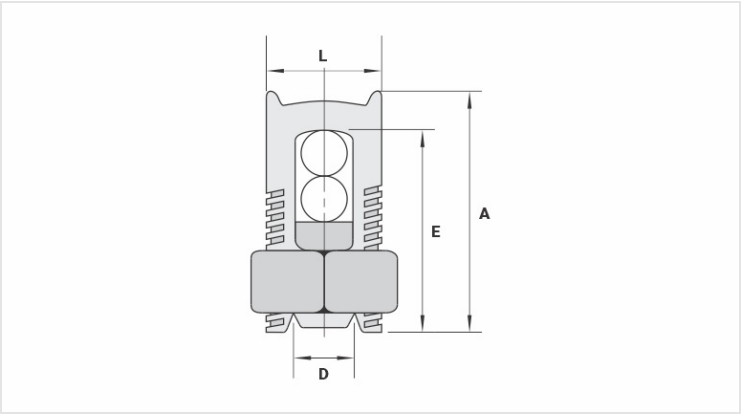

Datasheet

Conductors		
Run (mm²)		150
Tap (mm²)		10 - 150
Dimensions (mm)		
L		26,0
A		50,5
C		28,0
D		16,2
E		47,5
Package		
Qty. / Package		15
Unit Weight (g)		165,00