

PF - SPLIT BOLT CONNECTOR

PF-240

Description


Purpose: Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.

Characteristics: Tightening connection. High electrical conductivity and corrosion resistance.

Application: Power distribution network and grounding in general.

Material: Body in electrolytic copper. Nut and rider in copper alloy.

Application Tool: Box, open-ended or monkey wrenches.

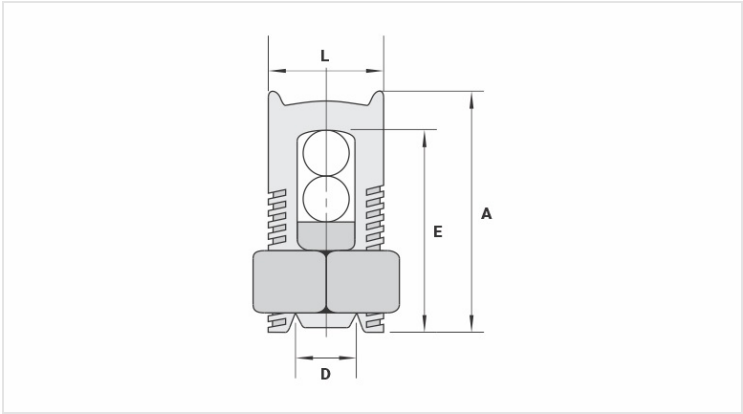

Datasheet

Conductors		
Run (mm²)		240
Tap (mm²)		95 - 240
Dimensions (mm)		
L		34,0
A		64,0
C		34,0
D		20,7
E		59,0
Package		
Qty. / Package		8
Unit Weight (g)		337,80