


PF - SPLIT BOLT CONNECTOR

PF-240

Description

- Purpose:** Tap or splice (low traction) for COPPERSTEEL or copper cables. Suitable for copper to copper connection.
- Characteristics:** Tightening connection. High electrical conductivity and corrosion resistance.
- Application:** Power distribution network and grounding in general.
- Material:** Body in electrolytic copper. Nut and rider in copper alloy.
- Application Tool:** Box, open-ended or monkey wrenches.

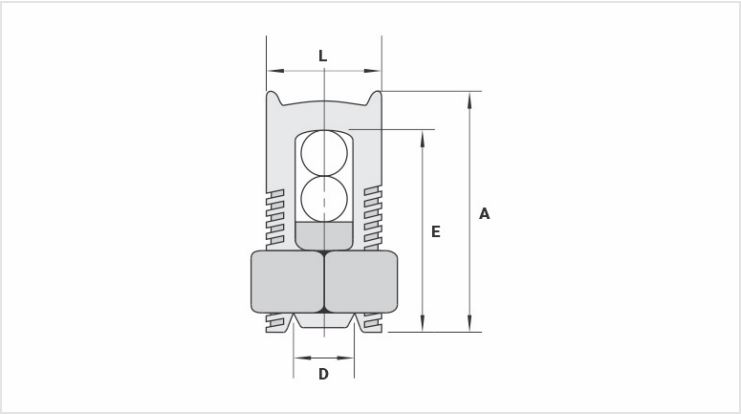

Datasheet

Conductors

Run (mm²)	240
Tap (mm²)	95 - 240

Dimensions (mm)

L	34,0
A	64,0
C	34,0
D	20,7
E	59,0

Package

Qty. / Package	8
Unit Weight (g)	337,80