

GPAE - STAY GROUNDING CLAMP

GPAE-15/16"-4 (SOB CONSULTA)

Description

**Purpose:** Parallel connections between grounding cable and stay. Recommended for connections between [Wire Ropes CAS-ALUMOSTEEL](#) (aluminized steel) or galvanized steel strands, with [CS - COPPERSTEEL wire](#).


**Features:** Tightening connection. High electrical conductivity and excellent corrosion resistance. Allows bimetallic connections.

**Application:** Transmission power transmission grids and general grounding systems.

**Material:** Bronze clamp with tin-plated. Accessories in hot-dip galvanized steel.<sup>1</sup>

**Application Tool:** Spanner set or open-ended wrench.

obs<sup>1</sup>: Only the clamp body is tin-plated.

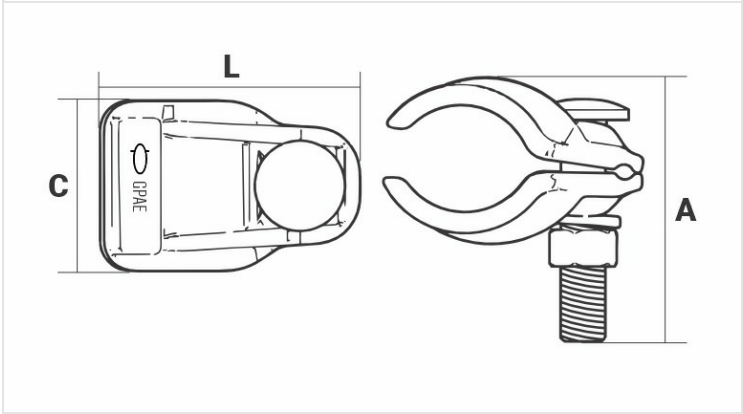

Datasheet

Conductor

Wire Rope (ALUMOSTEEL or Steel)		
Inches		1/2 - 15/16
Diameter (mm)		12,70 - 23,10
Counterpoise (COPPERSTEEL)		
Cross Section (AWG/MCM)		4
Diameter (mm)		5,18

Dimensions (mm)

L	50,0
A	70,0
C	40,0
Screw	M12

Package

Qty. / Package	20pc (Caixa 3) / 80pc (Caixa 5)
Unit Weight (g)	100,00