

GPAE - STAY GROUNDING CLAMP

GPAE-1.1/2"-4

Description

Purpose: Parallel connections between grounding cable and stay. Recommended for connections between [Wire Ropes CAS-ALUMOSTEEL](#) (aluminized steel) or galvanized steel strands, with [CS - COPPERSTEEL wire](#).


Features: Tightening connection. High electrical conductivity and excellent corrosion resistance. Allows bimetallic connections.

Application: Transmission power transmission grids and general grounding systems.

Material: Bronze clamp with tin-plated. Accessories in hot-dip galvanized steel.¹

Application Tool: Spanner set or open-ended wrench.

obs¹: Only the clamp body is tin-plated.

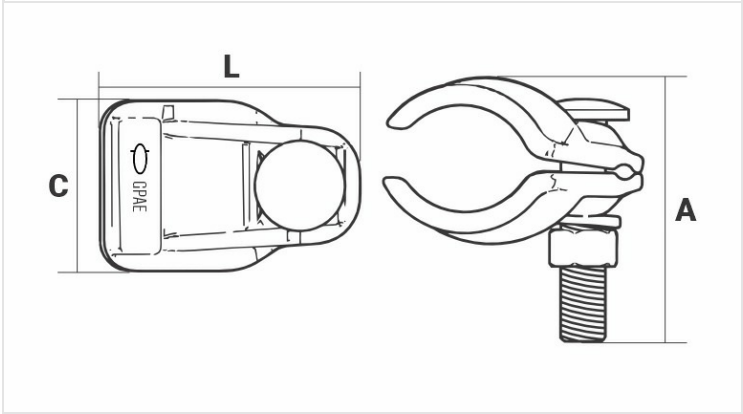

Datasheet

Conductor

Wire Rope (ALUMOSTEEL or Steel)	
Inches	1 - 1.1/2
Diameter (mm)	25,00 - 38,00
Counterpoise (COPPERSTEEL)	
Cross Section (AWG/MCM)	4
Diameter (mm)	5,18

Dimensions (mm)

L	70,0
A	70,0
C	45,0
Screw	M12

Package

Qty. / Package	20pc (Caixa 3) / 80pc (Caixa 5)
Unit Weight (g)	270,00