SACC - COPPER "C" GROUNDING COMPRESSION CONNECTORS

SACC-120-70

Description

Purpose: Cable to cable splice or tap connector. Suitable for COPPERSTEEL (Copper Clad Steel) and copper cables.

Characteristics: Compression connection. High resistance to corrosion. It can be buried directly into the ground or concrete.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding), grounding in telecommunication networks, grounding in substations).

Material: Copper alloy, supplied with anti-oxidant compound INTELTROX-Cu.

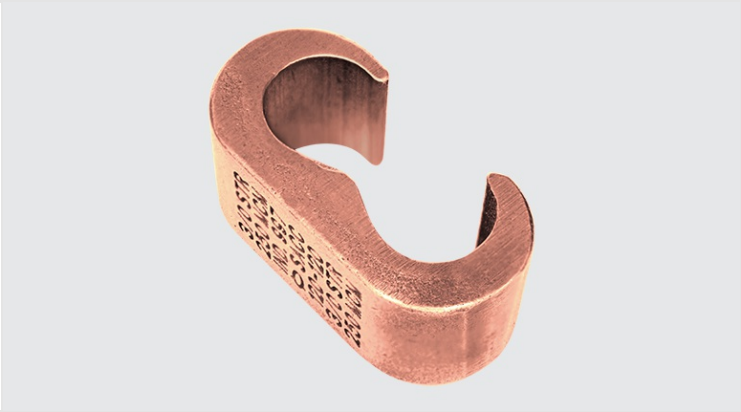

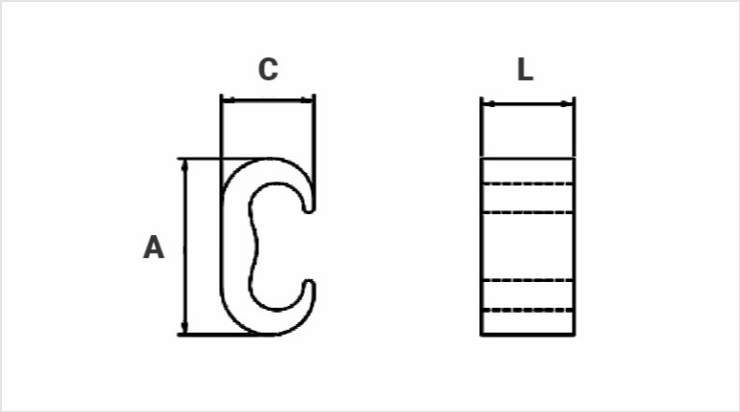

Datasheet

Conductor	
Run	
AWG/MCM	3/0 - 250
mm²	95 - 120
Tap	
AWG/MCM	Fio 6 - 2/0
mm²	10 - 70
Die Index	IU-997
Application Tool	AY-96/CY-96/AHM-400/AHB-400
Compressions	1
Dimensions (mm)	
L	18,5
A	49,0
C	24,0
Package	
Qty. / Package	30
Unit Weight (g)	95,00