

151,00

SACG - CABLE TO GROUND ROD COMPRESSION GROUNDING SYSTEM

SACG-5834-70

Description


Purpose: Connection between ground rod to cable and cable to cable. Suitable for COPPERSTEEL and copper wires and cables.

Characteristics: Compression connection. High resistance to corrosion. It can be buried directly into the ground or concrete.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding), grounding in telecommunication networks, grounding in substations).

Material: Copper alloy, supplied with antioxide compound INTELTROX-Cu.



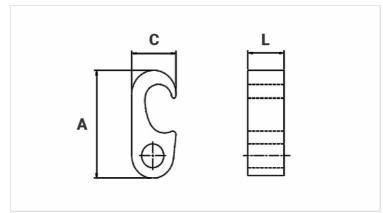

Datasheet

Unit Weight (g)

Conductors / Ground Rod	
Run	
Ground Rod	5/8" - 3/4"
Conductor	250 MCM - 500 MCM
Тар	
AWG/MCM	1/0 - 2/0
mm²	50 - 70
Die Index	IU-998
Die mack	10 330
Application Tool	AY-96/CY-96/AHM-400/AHB-400
Application Tool	AY-96/CY-96/AHM-400/AHB-400
Application Tool Compressions	AY-96/CY-96/AHM-400/AHB-400
Application Tool Compressions Dimensions (mm)	AY-96/CY-96/AHM-400/AHB-400 1
Application Tool Compressions Dimensions (mm)	AY-96/CY-96/AHM-400/AHB-400 1
Application Tool Compressions Dimensions (mm) L A	AY-96/CY-96/AHM-400/AHB-400 1 19,0 58,5