CCO - COMPRESSION GROUNDING CONNECTOR

CCO-25-25

Description


Purpose: Cable to cable splice or branch. Suitable for COPPERSTEEL and copper cables.

Characteristics: Compression connection. High resistance to corrosion. It can be buried directly into the ground or concrete.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding), grounding in telecommunication networks, grounding in substations).

Material: Copper alloy, supplied with antioxide compound INTELTROX-Cu.



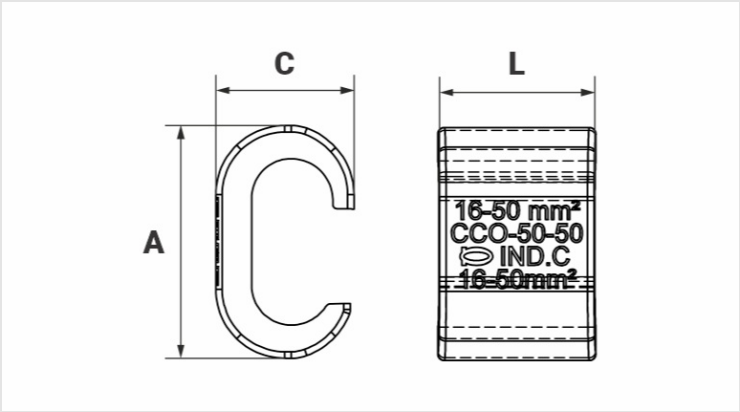

Datasheet

Conductor	
Run	
AWG/MCM	8 - 4
mm²	10 - 25
Tap	
AWG/MCM	8 - 4
mm²	10 - 25
Application Tool	
Mechanical	
Plier	AT-60
Die	IW-BG
Hydraulic	
Plier	AY-96/CY-96/AHM-400/AHB-400
Die	IU-BG
Compressions	1
Dimensions (mm)	
L	18,0
A	20,5
C	12,0
Package	
Qty. / Package	100

Unit Weight (g)	19,15