CCO - COMPRESSION GROUNDING CONNECTOR

CCO-50-50

Description


Purpose: Cable to cable splice or branch. Suitable for COPPERSTEEL and copper cables.

Characteristics: Compression connection. High resistance to corrosion. It can be buried directly into the ground or concrete.

Application: Grounding systems in general (power distribution systems, grounding grids, residential, building and industrial grounding), grounding in telecommunication networks, grounding in substations).

Material: Copper alloy, supplied with antioxide compound INTELTROX-Cu.



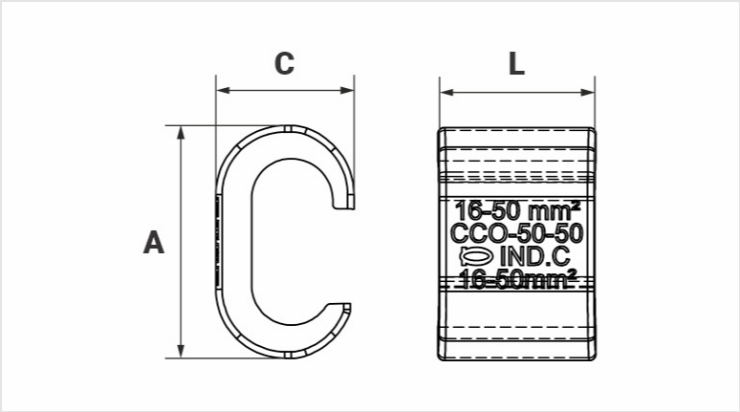

Datasheet

Conductor	
Run	
AWG/MCM	6 - 1/0
mm²	16 - 50
Tap	
AWG/MCM	6 - 1/0
mm²	16 - 50
Application Tool	
Mechanical	
Plier	-
Die	-
Hydraulic	
Plier	AY-96/CY-96/AHM-400/AHB-400
Die	IU-C
Compressions	1
Dimensions (mm)	
L	18,5
A	28,0
C	17,0
Package	
Qty. / Package	50

Unit Weight (g)	31,20