

PH - DRIVING STUD

PH-34

Description

Purpose: Used for driving sectional copperbonded ground rods (IHP).

Characteristics: High impact and shock resistance.


Application: Grounding of sectional copperbonded ground rod. The driving stud is attached to the coupling to

prevent damage to the threads of the stud during ground rod driving.

Material: High mechanical resistance steel.

Finish: Black oxidation.



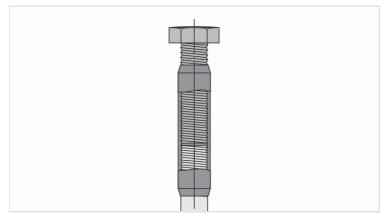

Datasheet

| Threaded Couplings LEH | LEH-34-R |
|--------------------------|---------------|
| Thread / Length of Screw | 3/4" UNC x 2" |
| Package | |
| Qty. / Package | 50 |
| Unit Weight (g) | 156.00 |