

**TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)**

TM-25-5

**Description**


**Purpose:** Termination of copper conductors.

**Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

**Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

**Material:** Electrolytic copper.

**Finish:** Tin plated.

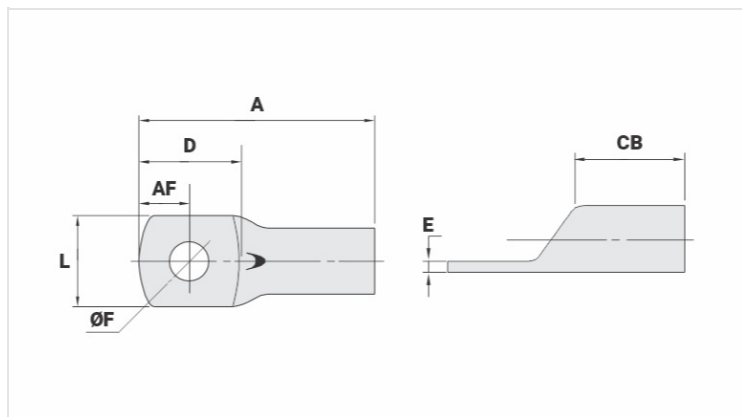

**Datasheet**

**Conductors - Cross Section (mm<sup>2</sup>)** 25

**Dimensions (mm)**

Diâmetro do Furo (mm)	5,2
Parafuso*	
Pol.	1/4
Métrico	M6
L	12,9
A	32,0
CB	11,0
AF	6,0
D	15,5
E	2,0

**Current (A)** 182

**Application Tool**

Alicate Mecânico	
Modelo	AT-60/68
Matriz (AT-60)	IW-4
Alicate Hidráulico (AY-96 / CY-96)	
Matriz Circunf.	IU-4
Matriz Hexagonal	H-4

**Package**

Qtd / Emb

100

Peso Unit. (g)

7,44