

IU-4

H-4

TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)

TM-25-10

Description

Purpose: Termination of copper conductors.


Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin plated.



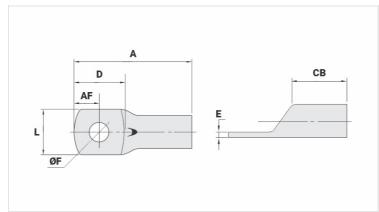

Datasheet

Hydraulic Pliers (AY/CY/AHM/AHB)

Circunferencial Die

Hexagonal Die

Conductors - Cross Section (mm²)	25
Dimensions (mm)	
Hole Diameter (mm)	10,5
Screw*	
Inches	3/8
Metric	M10
L	15,5
A	34,0
CB	11,0
AF	8,0
D	18,0
E	2,0
Current (A)	182
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-4

Package	
Qty. / Package	100
Unit Weight (g)	6,90