

IU-40 H-40

TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)

TM-400-13

Description

Purpose: Termination of copper conductors.


Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin plated.



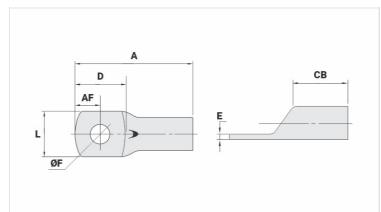

Datasheet

Hydraulic Pliers (AY/CY/AHM/AHB)

Circunferencial Die

Hexagonal Die

Conductors - Cross Section (mm²)	400
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	46,5
A	101,5
CB	37,0
AF	19,0
D	44,0
E	5,3
Current (A)	1085
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-

_		_			
D:	ac	٠.	2	NI 4	2

Qty. / Package

Unit Weight (g) 208,80