

IU-40 H-40

TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)

TM-400

Description

Purpose: Termination of copper conductors.


Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin plated.



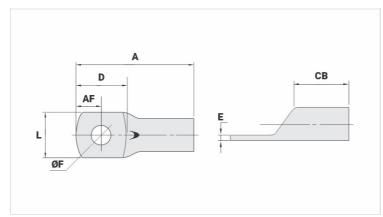

Datasheet

Hydraulic Pliers (AY/CY/AHM/AHB)

Circunferencial Die

Hexagonal Die

| Conductors - Cross Section | (mm²) 400 | |
|-----------------------------------|-----------|--|
| Dimensions (mm) | | |
| Hole Diameter (mm) | 17,5 | |
| Screw* | | |
| Inches | 5/8 | |
| Metric | M16 | |
| L | 46,5 | |
| А | 101,5 | |
| СВ | 37,0 | |
| AF | 19,0 | |
| D | 44,0 | |
| E | 5,3 | |
| Current (A) | 1085 | |
| Application Tool | | |
| Mechanical Pliers | | |
| Model | - | |
| Die (AT-60) | - | |
| | | |

| Package | |
|---------|--|

Qty. / Package

Unit Weight (g) 204,80