TM - COPPER COMPRESSION TERMINAL (ONE HOLE / SHORT BARREL)

TM-630

Description

Purpose: Termination of copper conductors.


Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin plated.



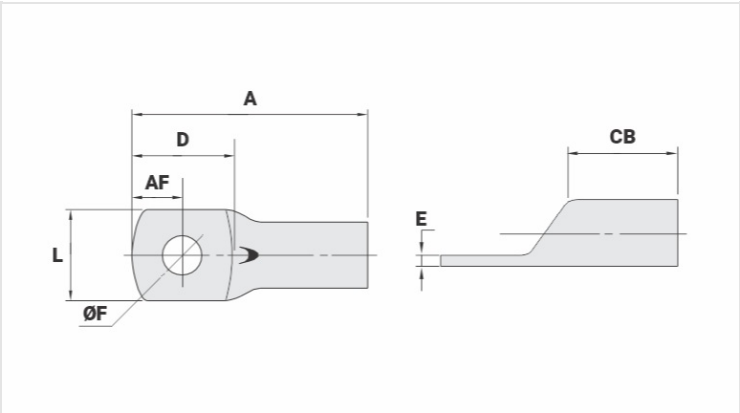

Datasheet

Conductors - Cross Section (mm²)	630
Dimensions (mm)	
Hole Diameter (mm)	17,5
Screw*	
Inches	5/8
Metric	M16
L	61,2
A	125,0
CB	50,5
AF	22,5
D	51,0
E	6,3
Current (A)	1454
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	-
Hexagonal Die	-

Package	
Qty. / Package	6
Unit Weight (g)	416,20