


TM-L - COPPER COMPRESSION TERMINAL (ONE HOLE / LONG BARREL)

TM-120-L

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin plated.

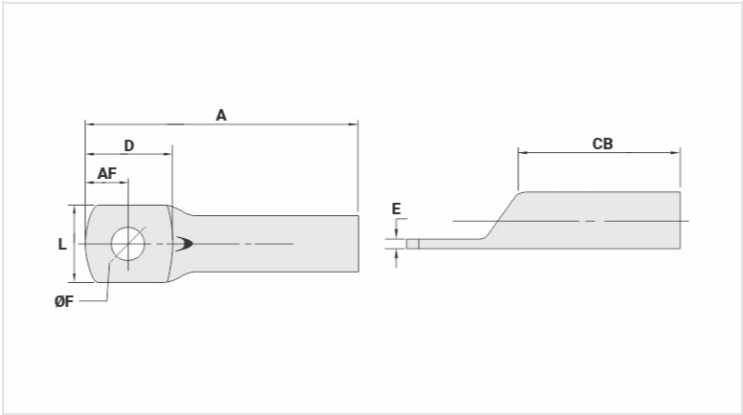

Datasheet

|                                               |          |
|-----------------------------------------------|----------|
| Conductors - Cross Section (mm <sup>2</sup> ) | 120      |
| Dimensions (mm)                               |          |
| Hole Diameter (mm)                            | 13,8     |
| Screw*                                        |          |
| Inches                                        | 1/2      |
| Metric                                        | M12      |
| L                                             | 27,0     |
| A                                             | 70,0     |
| CB                                            | 36,0     |
| AF                                            | 12,0     |
| D                                             | 25,0     |
| E                                             | 3,3      |
| Current (A)                                   | 500      |
| Application Tool                              |          |
| Mechanical Pliers                             |          |
| Model                                         | AT-60/68 |
| Die (AT-60)                                   | IW-27    |
| Hydraulic Pliers (AY/CY/AHM/AHB)              |          |
| Circunferencial Die                           | IU-27    |
| Hexagonal Die                                 | H-27     |

| Package         |       |
|-----------------|-------|
| Qty. / Package  | 40    |
| Unit Weight (g) | 53,40 |