


TM-L - COPPER COMPRESSION TERMINAL (ONE HOLE / LONG BARREL)

TM-185-L-17

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin plated.

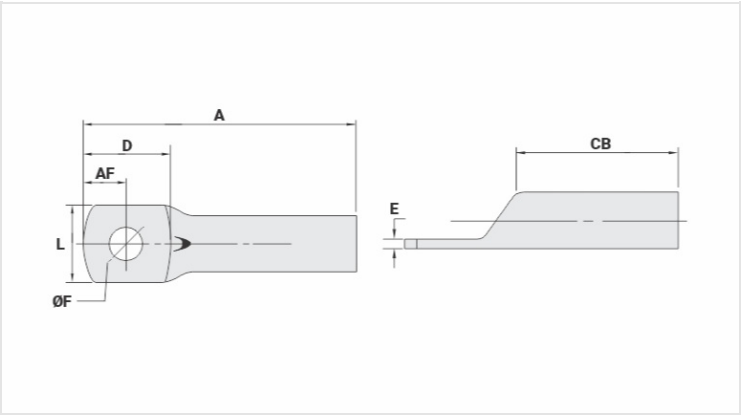

Datasheet

|                                               |       |
|-----------------------------------------------|-------|
| Conductors - Cross Section (mm <sup>2</sup> ) | 185   |
| Dimensions (mm)                               |       |
| Hole Diameter (mm)                            | 17,5  |
| Screw*                                        |       |
| Inches                                        | 5/8   |
| Metric                                        | M16   |
| L                                             | 32,0  |
| A                                             | 80,0  |
| CB                                            | 39,0  |
| AF                                            | 13,5  |
| D                                             | 29,5  |
| E                                             | 3,8   |
| Current (A)                                   | 661   |
| Application Tool                              |       |
| Mechanical Pliers                             |       |
| Model                                         | -     |
| Die (AT-60)                                   | -     |
| Hydraulic Pliers (AY/CY/AHM/AHB)              |       |
| Circunferencial Die                           | IU-31 |
| Hexagonal Die                                 | H-31  |

| Package         |       |
|-----------------|-------|
| Qty. / Package  | 25    |
| Unit Weight (g) | 76,00 |