


TM-2 - COPPER COMPRESSION TERMINAL (TWO HOLES / SHORT BARREL)

TM-630-2

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin plated.

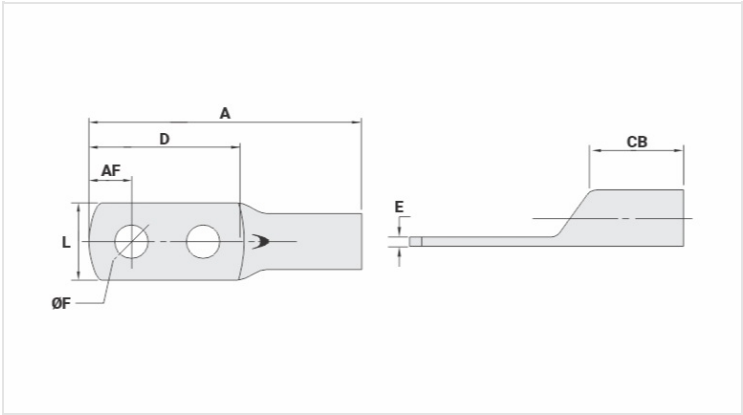

Datasheet

Conductors - Cross Section (mm²)	630
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	61,2
A	169,0
CB	50,5
AF	22,5
D	95,5
E	6,3
Current (A)	1454
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	-
Hexagonal Die	-

Package	
Qty. / Package	6
Unit Weight (g)	550,00