


TM-2L - COPPER COMPRESSION TERMINAL (TWO HOLES / LONG BARREL)

TM-70-2L

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin plated.

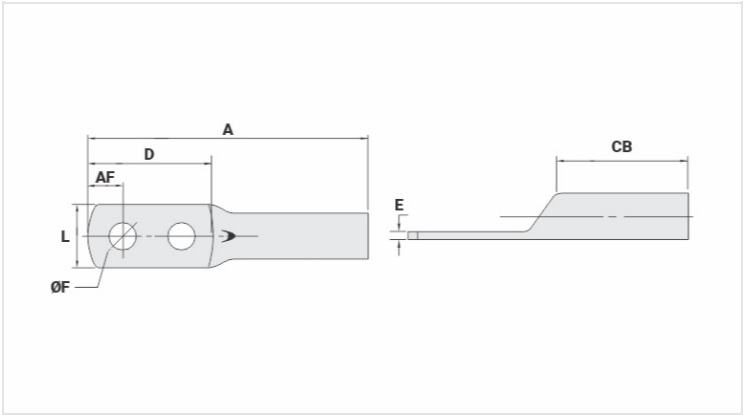

Datasheet

|                                  |          |
|----------------------------------|----------|
| Conductors - Cross Section (mm²) | 70       |
| Dimensions (mm)                  |          |
| Hole Diameter (mm)               | 13,8     |
| Screw*                           |          |
| Inches                           | 1/2      |
| Metric                           | M12      |
| L                                | 20,3     |
| A                                | 102,4    |
| CB                               | 28,5     |
| AF                               | 10,0     |
| D                                | 66,4     |
| E                                | 3,0      |
| Current (A)                      | 353      |
| Application Tool                 |          |
| Mechanical Pliers                |          |
| Model                            | AT-60/68 |
| Die (AT-60)                      | IW-26    |
| Hydraulic Pliers (AY/CY/AHM/AHB) |          |
| Circunferencial Die              | IU-26    |
| Hexagonal Die                    | H-26     |

| Package         |       |
|-----------------|-------|
| Qty. / Package  | 20    |
| Unit Weight (g) | 45,50 |