TF - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / SHORT BARREL)

TF-25-8

Description

Purpose: Termination of copper conductors.


Characteristics: High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

Applications: Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin Plated.



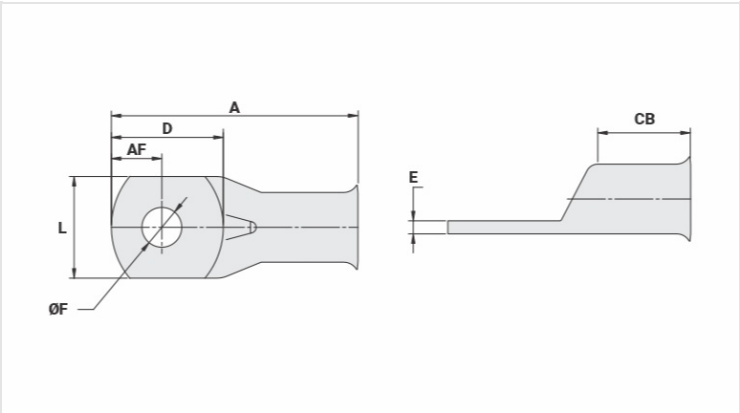

Datasheet

Conductors - Cross Section (mm²)	25
Dimensions (mm)	
Hole Diameter (mm)	8,5
Screw*	
Inches	5/16
Metric	M8
L	12,8
A	29,3
CB	11,0
AF	5,75
D	14,5
E	2,0
Current (A)	182
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-4
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-4
Hexagonal Die	H-4

Package	
Qty. / Package	100
Unit Weight (g)	6,75