# TF - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / SHORT BARREL)

TF-95-8

## Description

**Purpose:** Termination of copper conductors.


**Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

**Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

**Material:** Electrolytic copper.

**Finish:** Tin Plated.



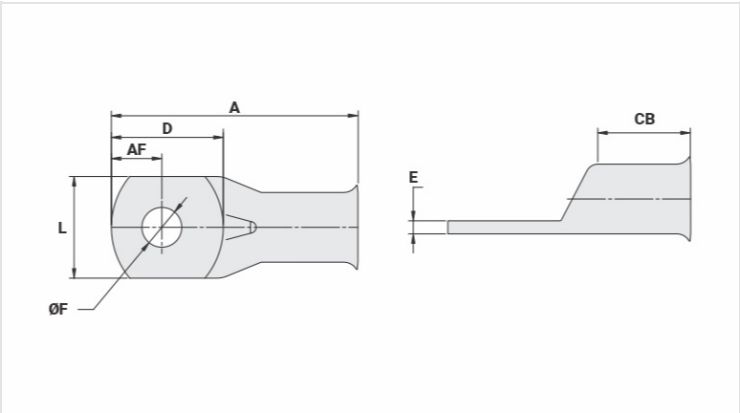


## Datasheet

| | |
|---|---|
| **Conductors - Cross Section (mm²)** | 95 |
| **Dimensions (mm)** | |
| Hole Diameter (mm) | 8,5 |
| Screw* | |
| Inches | 5/16 |
| Metric | M8 |
| L | 24,0 |
| A | 49,0 |
| CB | 17,5 |
| AF | 10,0 |
| D | 22,0 |
| E | 3,0 |
| **Current (A)** | 430 |
| **Application Tool** | |
| Mechanical Pliers | |
| Model | AT-60/68 |
| Die (AT-60) | IW-27 |
| Hydraulic Pliers (AY/CY/AHM/AHB) | |
| Circunferencial Die | IU-27 |
| Hexagonal Die | H-27 |

| Package | |
|---|---|
| Qty. / Package | 50 |
| Unit Weight (g) | 28,50 |