

IU-44 H-44

## TF - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / SHORT BARREL)

TF-500

## **Description**

**Purpose:** Termination of copper conductors.


**Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

**Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin Plated.



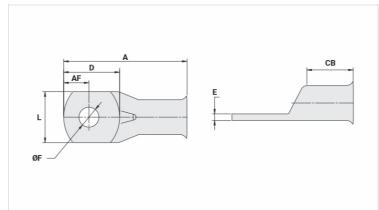

## **Datasheet**

Circunferencial Die

Hexagonal Die

Conductors - Cross Section (mm²)	500
	500
Dimensions (mm)	
Hole Diameter (mm)	17,5
Screw*	
Inches	5/8
Metric	M16
L	52,0
A	108,0
СВ	42,0
AF	19,0
D	45,0
E	5,1
Current (A)	1253
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-
Hydraulic Pliers (AY/CY/AHM/AHB)	

Package	

Qty. / Package 8

Unit Weight (g) 236,50