


TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-10-L-6

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

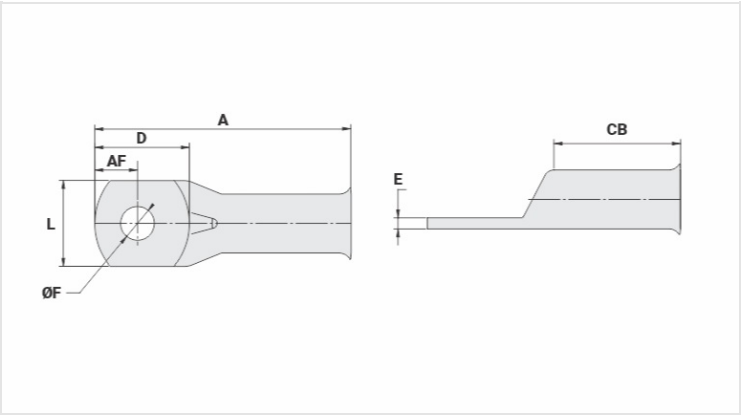

Datasheet

Conductors - Cross Section (mm <sup>2</sup> )	10
Dimensions (mm)	
Hole Diameter (mm)	6,5
Screw*	
Inches	1/4
Metric	M6
L	8,6
A	31,0
CB	16,0
AF	5,0
D	11,0
E	1,5
Current (A)	101
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-8
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-8
Hexagonal Die	H-8

Package	
Qty. / Package	100
Unit Weight (g)	3,00