


TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-50-L-10

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

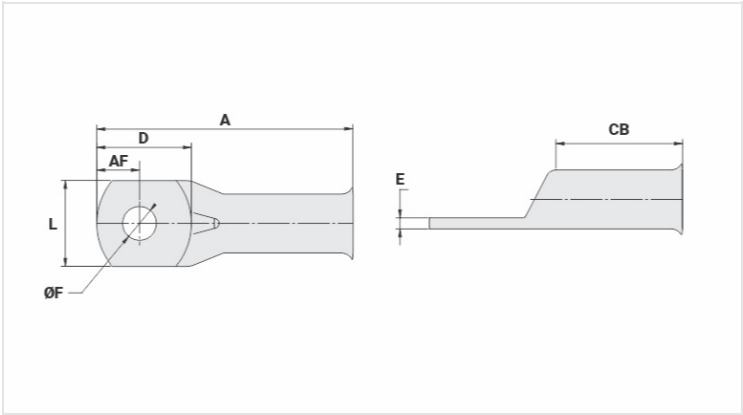

Datasheet

Conductors - Cross Section (mm ²)		50
Dimensions (mm)		
Hole Diameter (mm)		10,5
Screw*		
Inches		3/8
Metric		M10
L		18,0
A		54,5
CB		27,0
AF		9,0
D		19,5
E		2,7
Current (A)		275
Application Tool		
Mechanical Pliers		
Model		AT-60/68
Die (AT-60)		IW-1
Hydraulic Pliers (AY/CY/AHM/AHB)		
Circunferencial Die		IU-2
Hexagonal Die		H-2

Package	
Qty. / Package	50
Unit Weight (g)	20,00