


TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-70-L-8

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

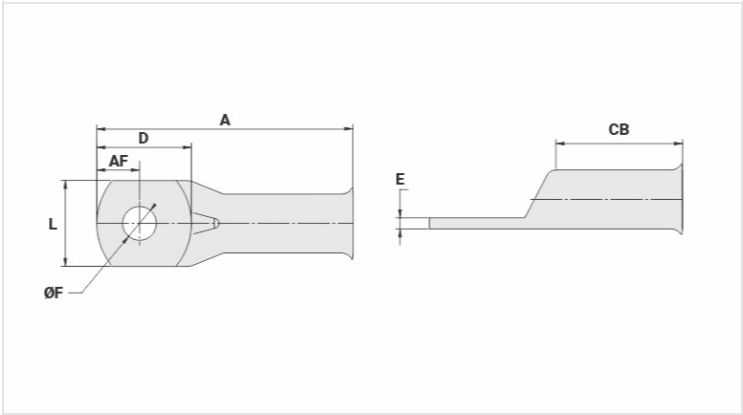

Datasheet

Conductors - Cross Section (mm ²)	70
Dimensions (mm)	
Hole Diameter (mm)	8,5
Screw*	
Inches	5/16
Metric	M8
L	20,3
A	58,0
CB	28,5
AF	10,0
D	22,0
E	3,0
Current (A)	353
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-26
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-26
Hexagonal Die	H-26

Package	
Qty. / Package	50
Unit Weight (g)	28,50