

TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-70-L-10

**Description**


**Purpose:** Termination of copper conductors.

**Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

**Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

**Material:** Electrolytic copper.

**Finish:** Tin Plated.

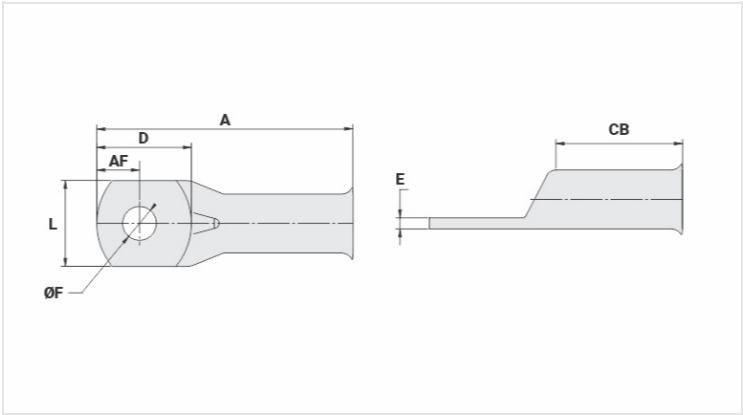

Datasheet

Conductors - Cross Section (mm²)	70
Dimensions (mm)	
Hole Diameter (mm)	10,5
Screw*	
Inches	3/8
Metric	M10
L	20,3
A	58,0
CB	28,5
AF	10,0
D	22,0
E	3,0
Current (A)	353
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-26
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-26
Hexagonal Die	H-26

Package	
Qty. / Package	50
Unit Weight (g)	27,70