


TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-95-L

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

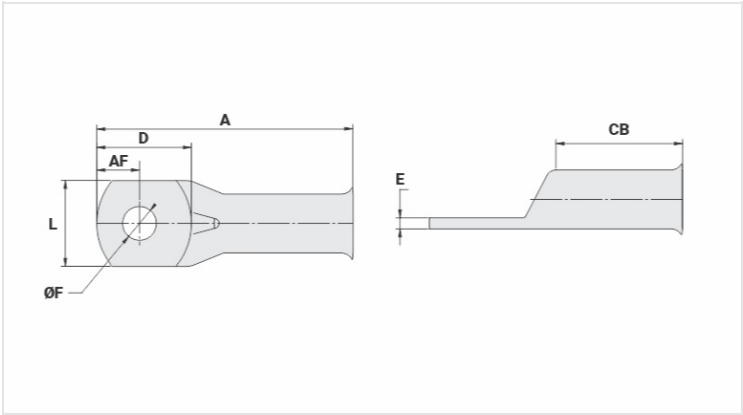

Datasheet

| | |
|----------------------------------|----------|
| Conductors - Cross Section (mm²) | 95 |
| Dimensions (mm) | |
| Hole Diameter (mm) | 13,8 |
| Screw* | |
| Inches | 1/2 |
| Metric | M12 |
| L | 24,0 |
| A | 60,0 |
| CB | 28,5 |
| AF | 10,0 |
| D | 22,0 |
| E | 3,0 |
| Current (A) | 430 |
| Application Tool | |
| Mechanical Pliers | |
| Model | AT-60/68 |
| Die (AT-60) | IW-27 |
| Hydraulic Pliers (AY/CY/AHM/AHB) | |
| Circunferencial Die | IU-27 |
| Hexagonal Die | H-27 |

| Package | |
|-----------------|-------|
| Qty. / Package | 50 |
| Unit Weight (g) | 32,10 |