

IU-31 H-31

## TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-185-L

## **Description**

**Purpose:** Termination of copper conductors.


**Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

**Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

Material: Electrolytic copper.

Finish: Tin Plated.



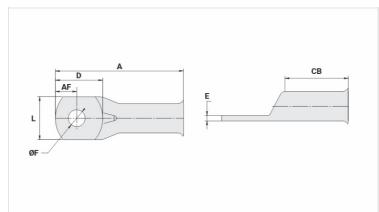

## **Datasheet**

Circunferencial Die

Hexagonal Die

Conductors - Cross Section (mm²)	185
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	32,5
A	79,0
CB	37,0
AF	13,5
D	29,5
E	3,8
Current (A)	661
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-
Hydraulic Pliers (AY/CY/AHM/AHB)	

_			_		
Р	а	C	ka	a	0

Qty. / Package 25

Unit Weight (g) 79,00